

UNIT-2


The medium access control (MAC) is a sublayer of the data link layer of the open system interconnections (OSI) reference model for data transmission. It is responsible for flow control and multiplexing for transmission medium. It controls the transmission of data packets via remotely shared channels. It sends data over the network interface card.

MAC Layer in the OSI Model

The Open System Interconnections (OSI) model is a layered networking framework that conceptualizes how communications should be done between heterogeneous systems. The data link layer is the second lowest layer. It is divided into two sublayers –

- The logical link control (LLC) sublayer
- The medium access control (MAC) sublayer

The following diagram depicts the position of the MAC layer –

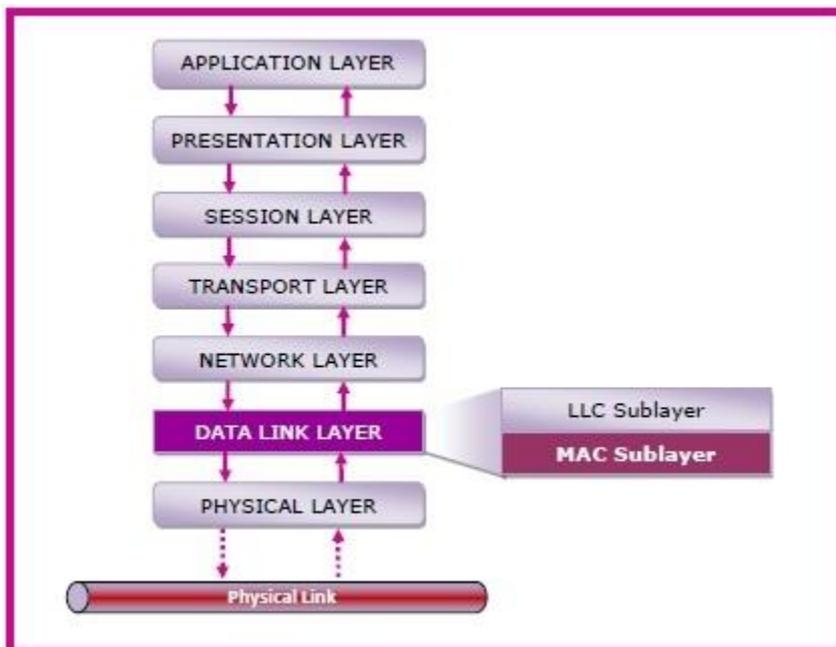

Functions of MAC Layer

- It provides an abstraction of the physical layer to the LLC and upper layers of the OSI network.
- It is responsible for encapsulating frames so that they are suitable for transmission via the physical medium.
- It resolves the addressing of source station as well as the destination station, or groups of destination stations.
- It performs multiple access resolutions when more than one data frame is to be transmitted. It determines the channel access methods for transmission.
- It also performs collision resolution and initiating retransmission in case of collisions.
- It generates the frame check sequences and thus contributes to protection against transmission errors.

MAC Addresses

MAC address or media access control address is a unique identifier allotted to a network interface controller (NIC) of a device. It is used as a network address for data transmission within a network segment like Ethernet, Wi-Fi, and Bluetooth.


MAC address is assigned to a network adapter at the time of manufacturing. It is hardwired or hard-coded in the network interface card (NIC). A MAC address comprises of six groups of two hexadecimal digits, separated by hyphens, colons, or no separators. An example of a MAC address is 00:0A:89:5B:F0:11.

ALOHA: ALOHA is a system for coordinating and arbitrating access to a shared communication Networks channel. It was developed in the 1970s by Norman Abramson and his colleagues at the University of Hawaii. The original system used for ground based radio broadcasting, but the system has been implemented in satellite communication systems.

A shared communication system like ALOHA requires a method of handling collisions that occur when two or more systems attempt to transmit on the channel at the same time. In the ALOHA system, a node transmits whenever data is available to send. If another node transmits at the same time, a collision occurs, and the frames that were transmitted are lost. However, a node can listen to broadcasts on the medium, even its own, and determine whether the frames were transmitted.

Aloha means "Hello". Aloha is a multiple access protocol at the datalink layer and proposes how multiple terminals access the medium without interference or collision. In 1972 Roberts developed a protocol that would increase the capacity of aloha two fold. The Slotted Aloha protocol involves dividing the time interval into discrete slots and each slot interval corresponds to the time period of one frame. This method requires synchronization between the sending nodes to prevent collisions.


There are two different versions of ALOHA

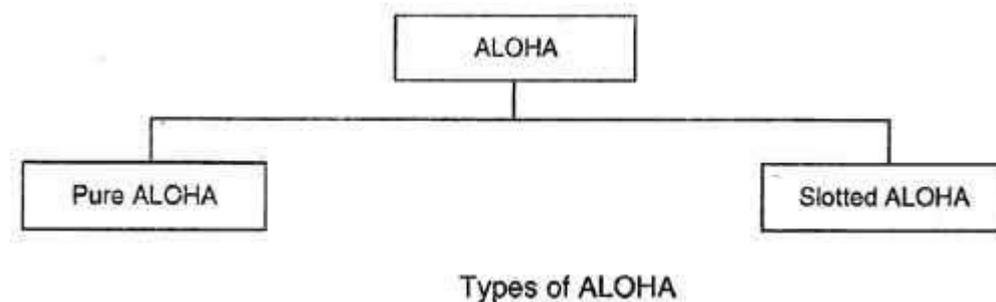

Pure ALOHA

- In pure ALOHA, the stations transmit frames whenever they have data to send.
- When two or more stations transmit simultaneously, there is collision and the frames are destroyed.
- In pure ALOHA, whenever any station transmits a frame, it expects the acknowledgement from the receiver.
- If acknowledgement is not received within specified time, the station assumes that the frame (or acknowledgement) has been destroyed.

- If the frame is destroyed because of collision the station waits for a random amount of time and sends it again. This waiting time must be random otherwise same frames will collide again and again.
- Therefore pure ALOHA dictates that when time-out period passes, each station must wait for a random amount of time before resending its frame. This randomness will help avoid more collisions.
- Figure shows an example of frame collisions in pure ALOHA.

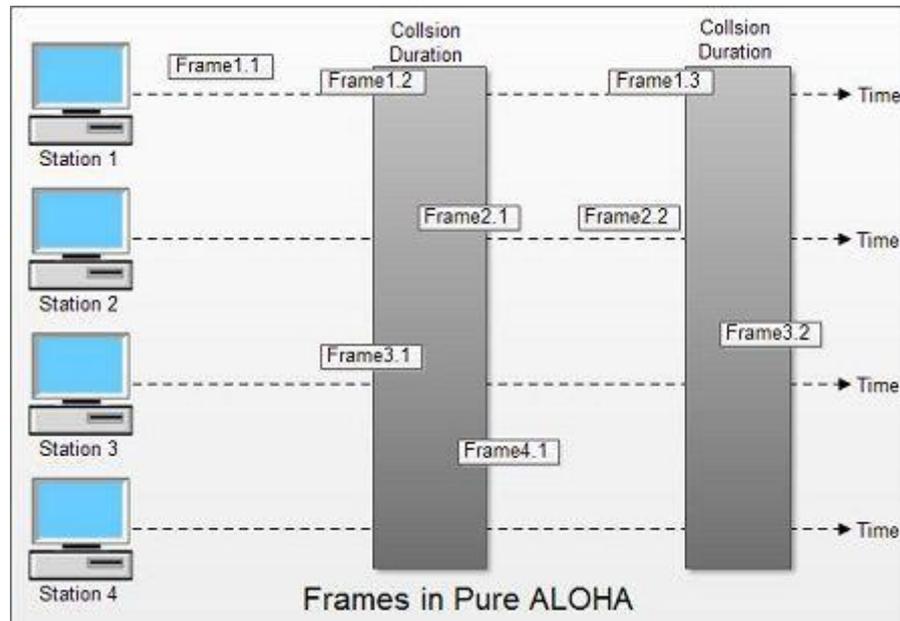


- In fig there are four stations that contended with one another for access to shared channel. All these stations are transmitting frames. Some of these frames collide because multiple frames are in contention for the shared channel. Only two frames, frame 1.1 and frame 2.2 survive. All other frames are destroyed.
- Whenever two frames try to occupy the channel at the same time, there will be a collision and both will be damaged. If first bit of a new frame overlaps with just the last bit of a frame almost finished, both frames will be totally destroyed and both will have to be retransmitted.

Slotted ALOHA

- Slotted ALOHA was invented to improve the efficiency of pure ALOHA as chances of collision in pure ALOHA are very high.
- In slotted ALOHA, the time of the shared channel is divided into discrete intervals called slots.


The stations can send a frame only at the beginning of the slot and only one frame is sent in each slot.

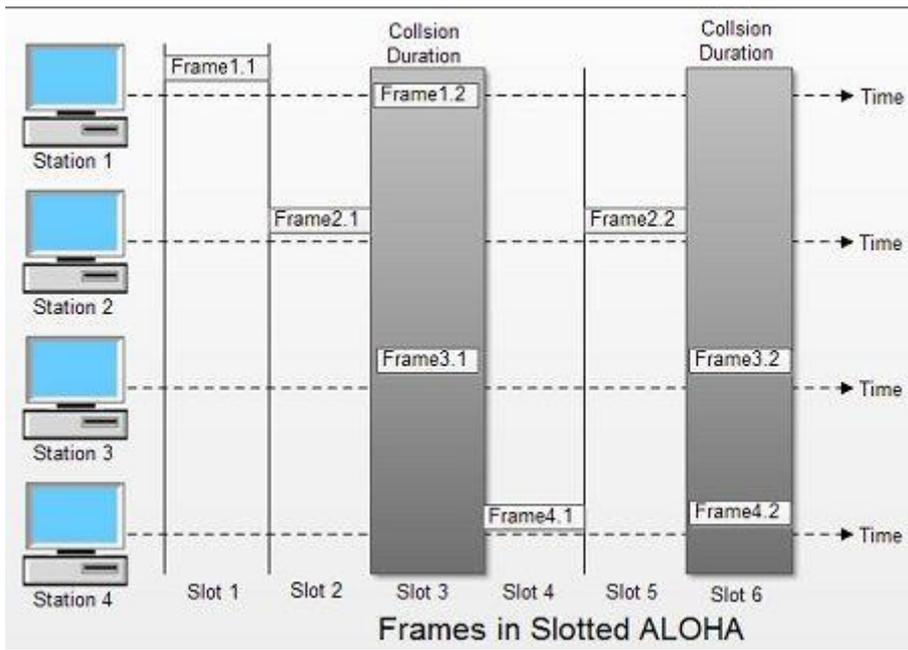

- In slotted ALOHA, if any station is not able to place the frame onto the channel at the beginning of the slot *i.e.* it misses the time slot then the station has to wait until the beginning of the next time slot.
- In slotted ALOHA, there is still a possibility of collision if two stations try to send at the beginning of the same time slot as shown in fig.
- Slotted ALOHA still has an edge over pure ALOHA as chances of collision are reduced to one-half.

Protocol Flow Chart for ALOHA

Fig. shows the protocol flow chart for ALOHA.

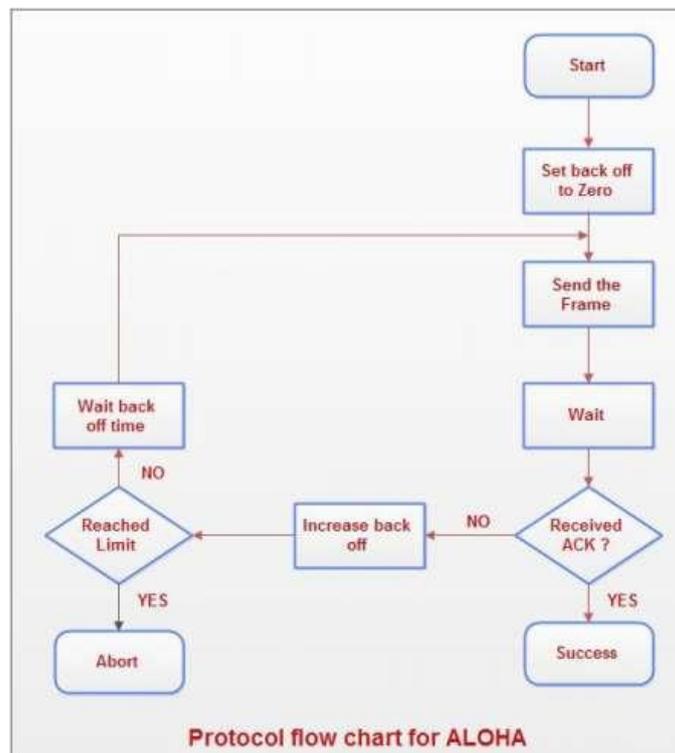

Explanation:

- A station which has a frame ready will send it.
- Then it waits for some time.
- If it receives the acknowledgement then the transmission is successful.
- Otherwise the station uses a backoff strategy, and sends the packet again.
- After many times if there is no acknowledgement then the station aborts the idea of transmission.


FDDI

Fiber Distributed Data Interface (FDDI) is a set of ANSI and ISO standards for transmission of data in local area network (LAN) over fiber optic cables. It is applicable in large LANs that can extend up to 200 kilometers in diameter.

Features


- FDDI uses optical fiber as its physical medium.
- It operates in the physical and medium access control (MAC layer) of the Open Systems Interconnection (OSI) network model.
- It provides high data rate of 100 Mbps and can support thousands of users.
- It is used in LANs up to 200 kilometers for long distance voice and multimedia communication.
- It uses ring based token passing mechanism and is derived from IEEE 802.4 token bus standard.
- It contains two token rings, a primary ring for data and token transmission and a secondary ring that provides backup if the primary ring fails.
- FDDI technology can also be used as a backbone for a wide area network (WAN).

The following diagram shows FDDI –

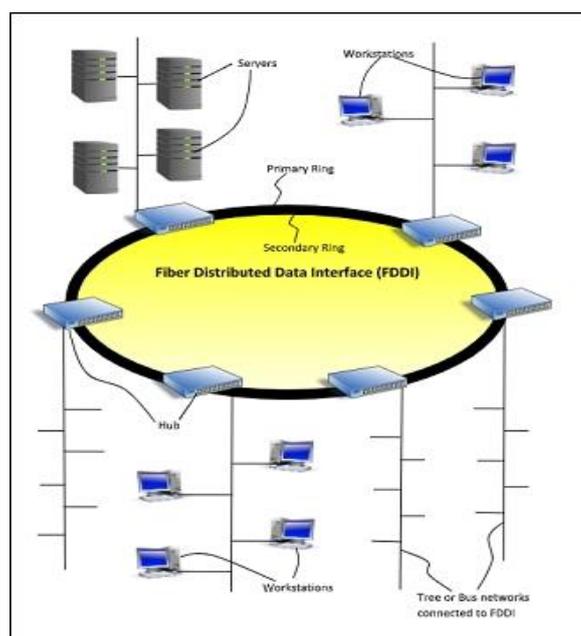

Frame Format

The frame format of FDDI is similar to that of token bus as shown in the following diagram –

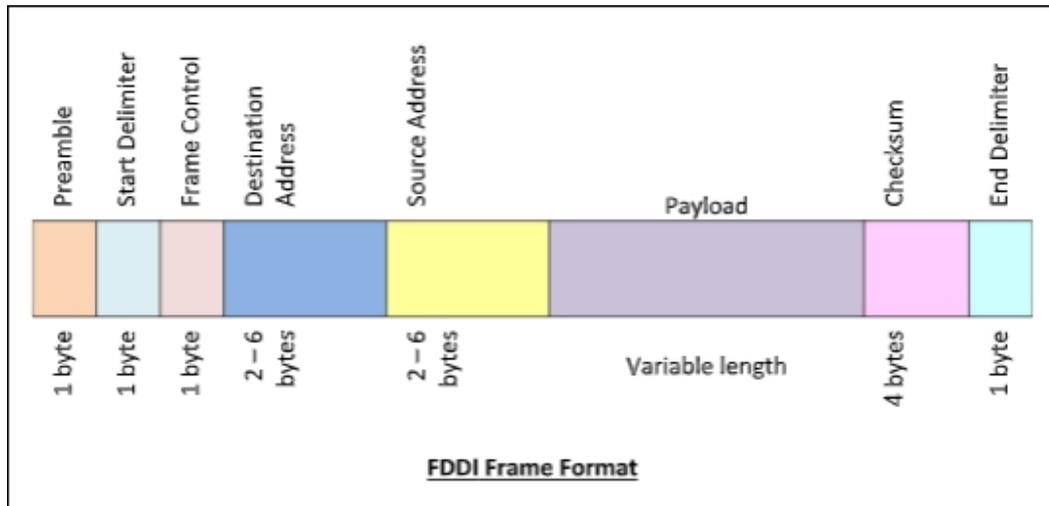

The fields of an FDDI frame are –


- **Preamble:** 1 byte for synchronization.
- **Start Delimiter:** 1 byte that marks the beginning of the frame.
- **Frame Control:** 1 byte that specifies whether this is a data frame or control frame.
- **Destination Address:** 2-6 bytes that specifies address of destination station.
- **Source Address:** 2-6 bytes that specifies address of source station.
- **Payload:** A variable length field that carries the data from the network layer.
- **Checksum:** 4 bytes frame check sequence for error detection.
- **End Delimiter:** 1 byte that marks the end of the frame.

Data Link Controls

Data Link Control is the service provided by the Data Link Layer to provide reliable data transfer over the physical medium. For example, In the half-duplex transmission mode, one device can only transmit the data at a time. If both the devices at the end of the links transmit the data simultaneously, they will collide and leads to the loss of the information. The Data link layer provides the coordination among the devices so that no collision occurs.

The Data link layer provides three functions:

- Line discipline
- Flow Control
- Error Control

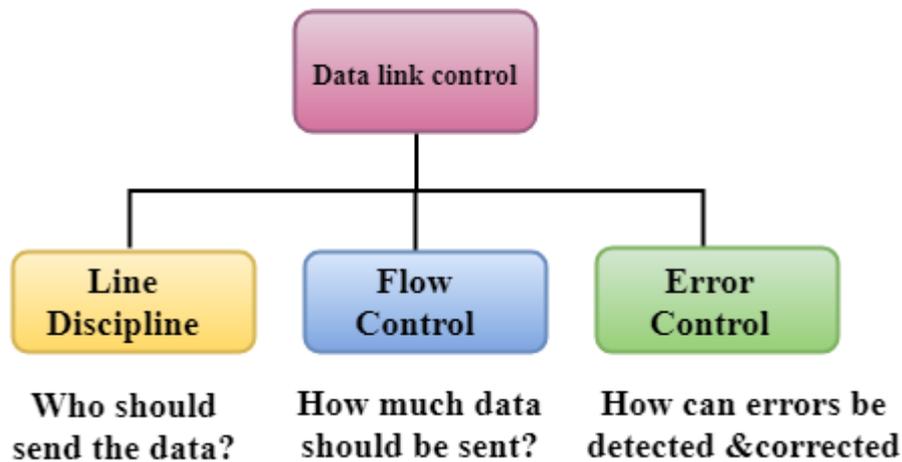

Line Discipline

- Line Discipline is a functionality of the Data link layer that provides the coordination among the link systems. It determines which device can send, and when it can send the data.

Line Discipline can be achieved in two ways:

- ENQ/ACK
- Poll/select

END/ACK

END/ACK stands for Enquiry/Acknowledgement is used when there is no wrong receiver available on the link and having a dedicated path between the two devices so that the device capable of receiving the transmission is the intended one.

END/ACK coordinates which device will start the transmission and whether the recipient is ready or not.

Working of END/ACK


The transmitter transmits the frame called an Enquiry (ENQ) asking whether the receiver is available to receive the data or not.

The receiver responds either with the positive acknowledgement(ACK) or with the negative acknowledgement(NACK) where positive acknowledgement means that the receiver is ready to receive the transmission and negative acknowledgement means that the receiver is unable to accept the transmission.

Following are the responses of the receiver:

- If the response to the ENQ is positive, the sender will transmit its data, and once all of its data has been transmitted, the device finishes its transmission with an EOT (END-of-Transmission) frame.
- If the response to the ENQ is negative, then the sender disconnects and restarts the transmission at another time.

- If the response is neither negative nor positive, the sender assumes that the ENQ frame was lost during the transmission and makes three attempts to establish a link before giving up.

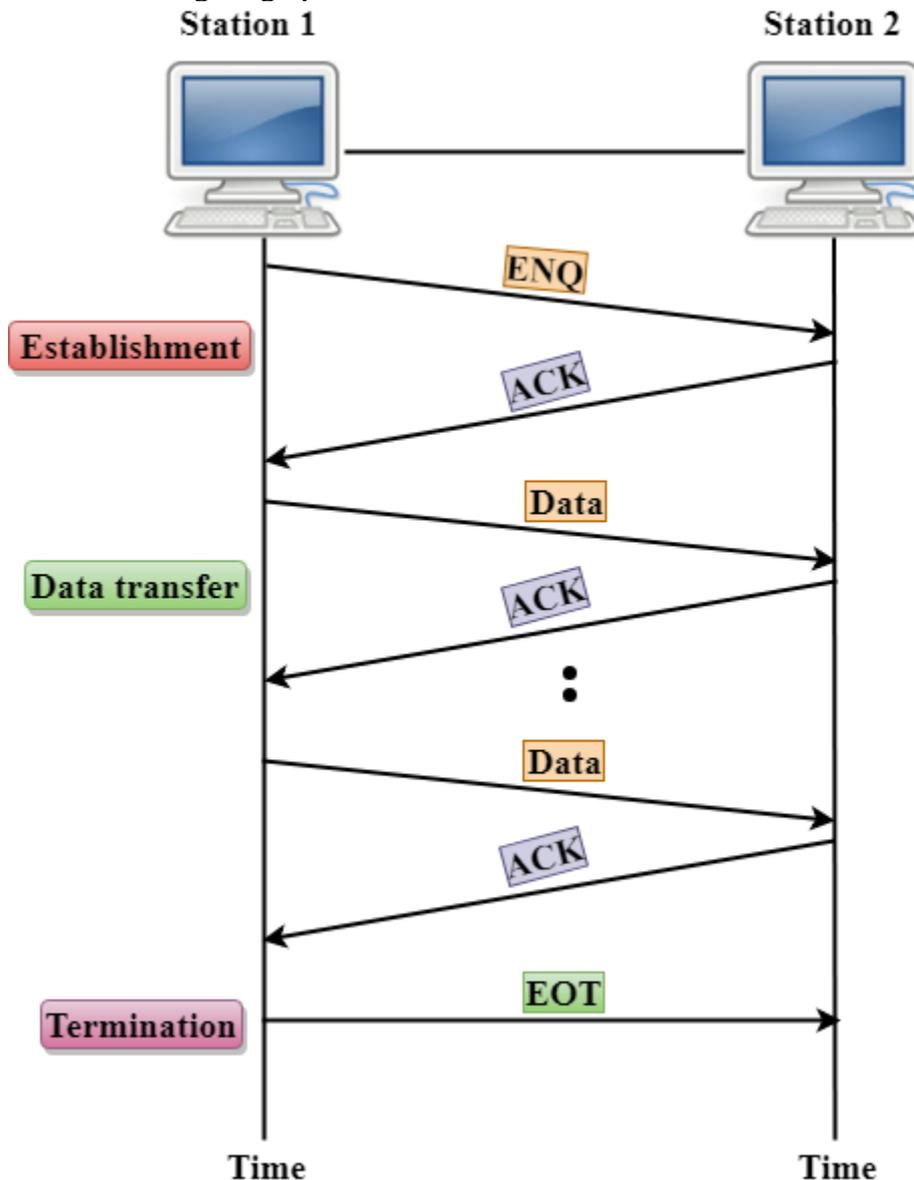

Poll/Select

The Poll/Select method of line discipline works with those topologies where one device is designated as a primary station, and other devices are secondary stations.


Working of Poll/Select

- In this, the primary device and multiple secondary devices consist of a single transmission line, and all the exchanges are made through the primary device even though the destination is a secondary device.
- The primary device has control over the communication link, and the secondary device follows the instructions of the primary device.
- The primary device determines which device is allowed to use the communication channel. Therefore, we can say that it is an initiator of the session.

- If the primary device wants to receive the data from the secondary device, it asks the secondary device that they anything to send, this process is known as polling.
- If the primary device wants to send some data to the secondary device, then it tells the target secondary to get ready to receive the data, this process is known as selecting.

Select


- The select mode is used when the primary device has something to send.
- When the primary device wants to send some data, then it alerts the secondary device for the upcoming transmission by transmitting a Select (SEL) frame, one field of the frame includes the address of the intended secondary device.
- When the secondary device receives the SEL frame, it sends an acknowledgement that indicates the secondary ready status.
- If the secondary device is ready to accept the data, then the primary device sends two or more data frames to the intended secondary device. Once the data has been transmitted, the secondary sends an acknowledgement specifies that the data has been received.

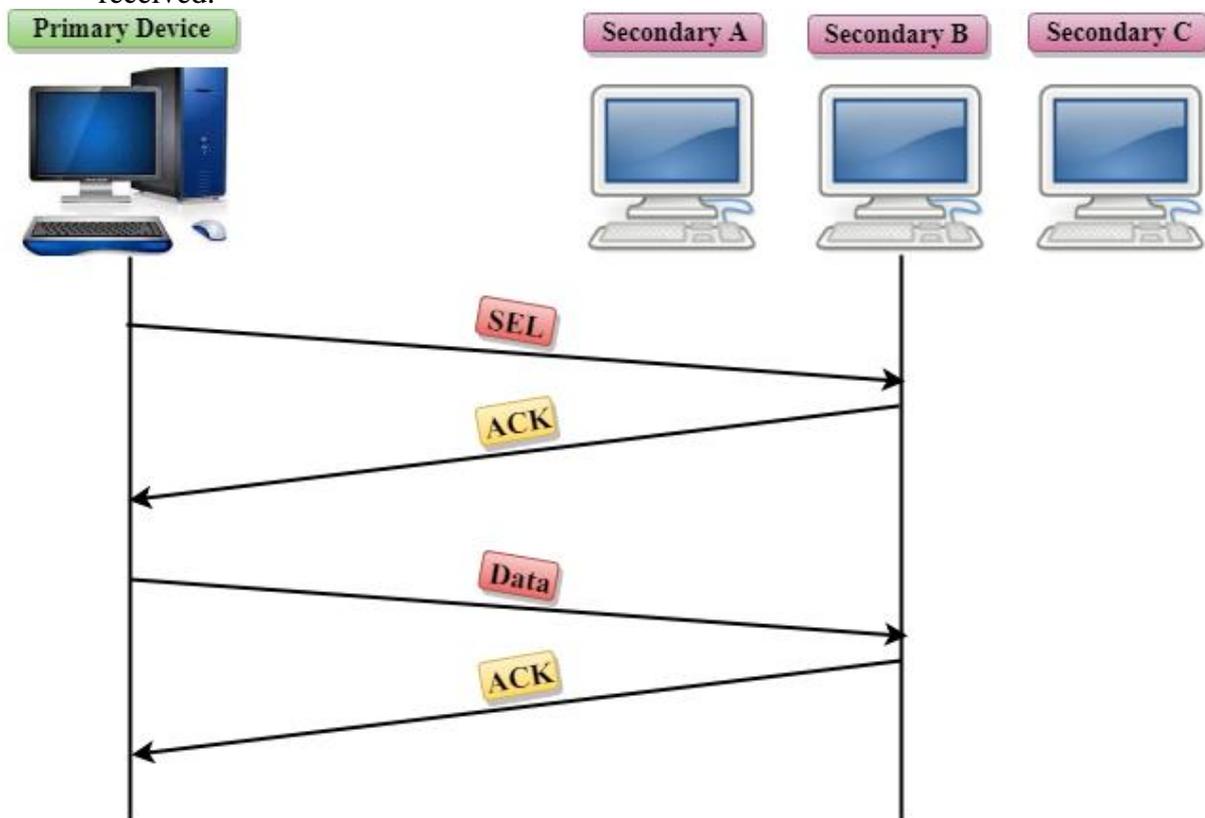

Poll

- The Poll mode is used when the primary device wants to receive some data from the secondary device.
- When a primary device wants to receive the data, then it asks each device whether it has anything to send.
- Firstly, the primary asks (poll) the first secondary device, if it responds with the NACK (Negative Acknowledgement) means that it has nothing to send. Now, it approaches the second secondary device, it responds with the ACK means that it has the data to send. The secondary device can send more than one frame one after

another or sometimes it may be required to send ACK before sending each one, depending on the type of the protocol being used.

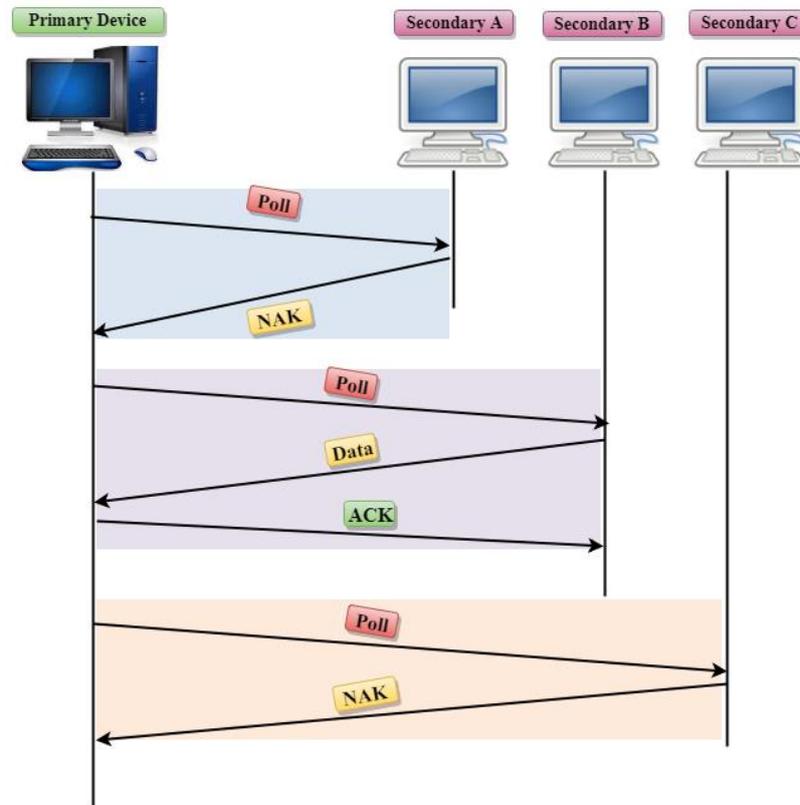

Flow Control

- It is a set of procedures that tells the sender how much data it can transmit before the data overwhelms the receiver.
- The receiving device has limited speed and limited memory to store the data. Therefore, the receiving device must be able to inform the sending device to stop the transmission temporarily before the limits are reached.
- It requires a buffer, a block of memory for storing the information until they are processed.

Two methods have been developed to control the flow of data:

- Stop-and-wait
- Sliding window

Stop-and-wait

- In the Stop-and-wait method, the sender waits for an acknowledgement after every frame it sends.
- When acknowledgement is received, then only next frame is sent. The process of alternately sending and waiting of a frame continues until the sender transmits the EOT (End of transmission) frame.

Advantage of Stop-and-wait

The Stop-and-wait method is simple as each frame is checked and acknowledged before the next frame is sent.

Disadvantage of Stop-and-wait


Stop-and-wait technique is inefficient to use as each frame must travel across all the way to the receiver, and an acknowledgement travels all the way before the next frame is sent. Each frame sent and received uses the entire time needed to traverse the link.

Sliding Window

- The Sliding Window is a method of flow control in which a sender can transmit the several frames before getting an acknowledgement.
- In Sliding Window Control, multiple frames can be sent one after the another due to which capacity of the communication channel can be utilized efficiently.
- A single ACK acknowledge multiple frames.
- Sliding Window refers to imaginary boxes at both the sender and receiver end.
- The window can hold the frames at either end, and it provides the upper limit on the number of frames that can be transmitted before the acknowledgement.
- Frames can be acknowledged even when the window is not completely filled.
- The window has a specific size in which they are numbered as modulo-n means that they are numbered from 0 to n-1. For example, if $n = 8$, the frames are numbered from 0,1,2,3,4,5,6,7,0,1,2,3,4,5,6,7,0,1.....
- The size of the window is represented as n-1. Therefore, maximum n-1 frames can be sent before acknowledgement.
- When the receiver sends the ACK, it includes the number of the next frame that it wants to receive. For example, to acknowledge the string of frames ending with frame number 4, the receiver will send the ACK containing the number 5. When the sender sees the ACK with the number 5, it got to know that the frames from 0 through 4 have been received.


Sender Window

- At the beginning of a transmission, the sender window contains n-1 frames, and when they are sent out, the left boundary moves inward shrinking the size of the window. For example, if the size of the window is w if three frames are sent out, then the number of frames left out in the sender window is w-3.
- Once the ACK has arrived, then the sender window expands to the number which will be equal to the number of frames acknowledged by ACK.
- For example, the size of the window is 7, and if frames 0 through 4 have been sent out and no acknowledgement has arrived, then the sender window contains only two frames, i.e., 5 and 6. Now, if ACK has arrived with a number 4 which means that 0 through 3 frames have arrived undamaged and the sender window is expanded to include the next four frames. Therefore, the sender window contains six frames (5,6,7,0,1,2).

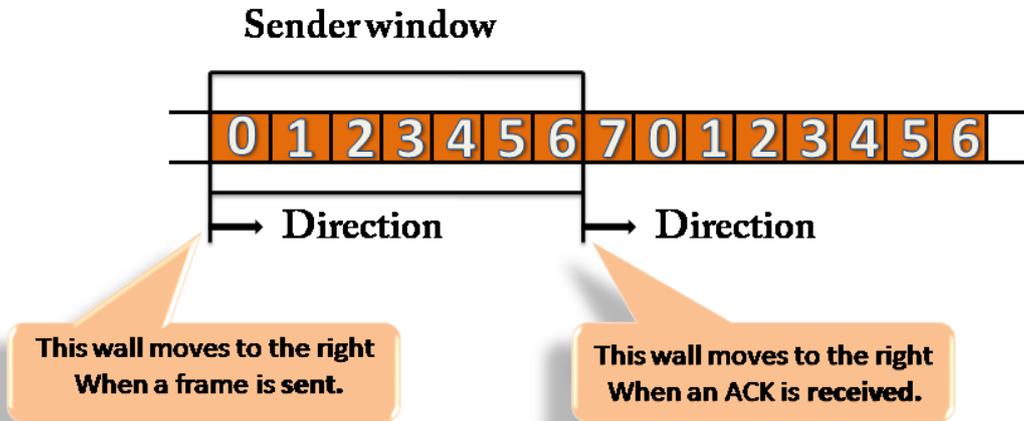

Receiver Window


- At the beginning of transmission, the receiver window does not contain n frames, but it contains $n-1$ spaces for frames.
- When the new frame arrives, the size of the window shrinks.
- The receiver window does not represent the number of frames received, but it represents the number of frames that can be received before an ACK is sent. For example, the size of the window is w , if three frames are received then the number of spaces available in the window is $(w-3)$.
- Once the acknowledgement is sent, the receiver window expands by the number equal to the number of frames acknowledged.
- Suppose the size of the window is 7 means that the receiver window contains seven spaces for seven frames. If the one frame is received, then the receiver window shrinks and moving the boundary from 0 to 1. In this way, window shrinks one by one, so window now contains the six spaces. If frames from 0 through 4 have sent, then the window contains two spaces before an acknowledgement is sent.

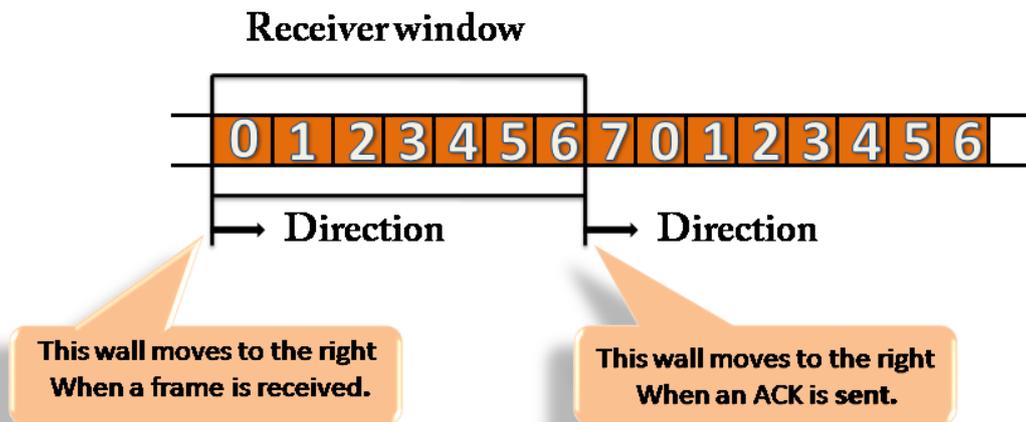

Error Control

Error Control is a technique of error detection and retransmission.

Categories of Error Control:

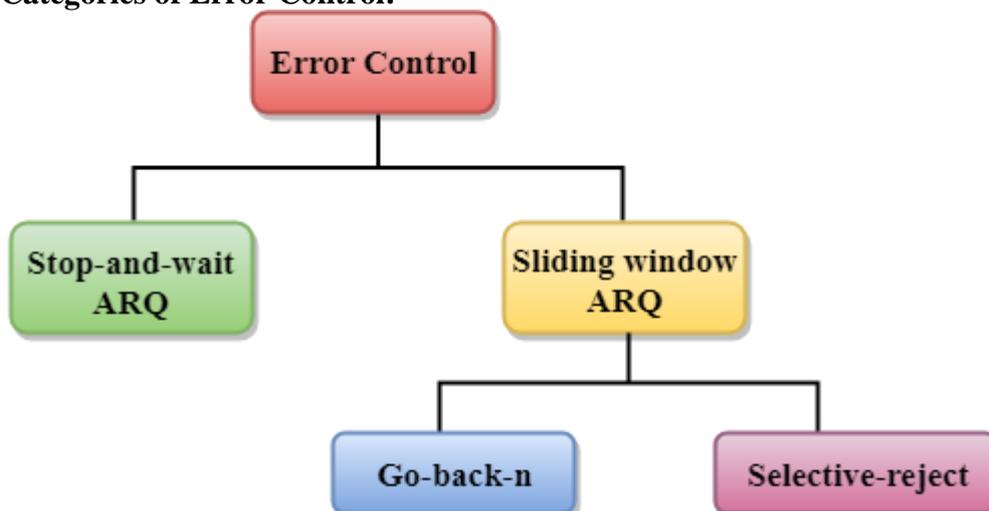

Stop-and-wait ARQ

Stop-and-wait ARQ is a technique used to retransmit the data in case of damaged or lost frames.

This technique works on the principle that the sender will not transmit the next frame until it receives the acknowledgement of the last transmitted frame.

Four features are required for the retransmission:

- The sending device keeps a copy of the last transmitted frame until the acknowledgement is received. Keeping the copy allows the sender to retransmit the data if the frame is not received correctly.
- Both the data frames and the ACK frames are numbered alternately 0 and 1 so that they can be identified individually. Suppose data 1 frame acknowledges the data 0 frame means that the data 0 frame has been arrived correctly and expects to receive data 1 frame.
- If an error occurs in the last transmitted frame, then the receiver sends the NAK frame which is not numbered. On receiving the NAK frame, sender retransmits the data.
- It works with the timer. If the acknowledgement is not received within the allotted time, then the sender assumes that the frame is lost during the transmission, so it will retransmit the frame.

Two possibilities of the retransmission:

- **Damaged Frame:** When the receiver receives a damaged frame, i.e., the frame contains an error, then it returns the NAK frame. For example, when the data 0 frame is sent, and then the receiver sends the ACK 1 frame means that the data 0 has arrived correctly, and transmits the data 1 frame. The sender transmits the next frame: data 1. It reaches undamaged, and the receiver returns ACK 0. The sender transmits the next frame: data 0. The receiver reports an error and returns the NAK frame. The sender retransmits the data 0 frame.
- **Lost Frame:** Sender is equipped with the timer and starts when the frame is transmitted. Sometimes the frame has not arrived at the receiving end so that it can be acknowledged neither positively nor negatively. The sender waits for acknowledgement until the timer goes off. If the timer goes off, it retransmits the last transmitted frame.

Sliding Window ARQ

SlidingWindow ARQ is a technique used for continuous transmission error control.

Three Features used for retransmission:

- In this case, the sender keeps the copies of all the transmitted frames until they have been acknowledged. Suppose the frames from 0 through 4 have been transmitted, and the last acknowledgement was for frame 2, the sender has to keep the copies of frames 3 and 4 until they receive correctly.
- The receiver can send either NAK or ACK depending on the conditions. The NAK frame tells the sender that the data have been received damaged. Since the sliding window is a continuous transmission mechanism, both ACK and NAK must be numbered for the identification of a frame. The ACK frame consists of a number that represents the next frame which the receiver expects to receive. The NAK frame consists of a number that represents the damaged frame.
- The sliding window ARQ is equipped with the timer to handle the lost acknowledgements. Suppose then n-1 frames have been sent before receiving any


acknowledgement. The sender waits for the acknowledgement, so it starts the timer and waits before sending any more. If the allotted time runs out, the sender retransmits one or all the frames depending upon the protocol used.

Two protocols used in sliding window ARQ:

- **Go-Back-n ARQ:** In Go-Back-N ARQ protocol, if one frame is lost or damaged, then it retransmits all the frames after which it does not receive the positive ACK.

Three possibilities can occur for retransmission:

- **Damaged Frame:** When the frame is damaged, then the receiver sends a NAK frame.

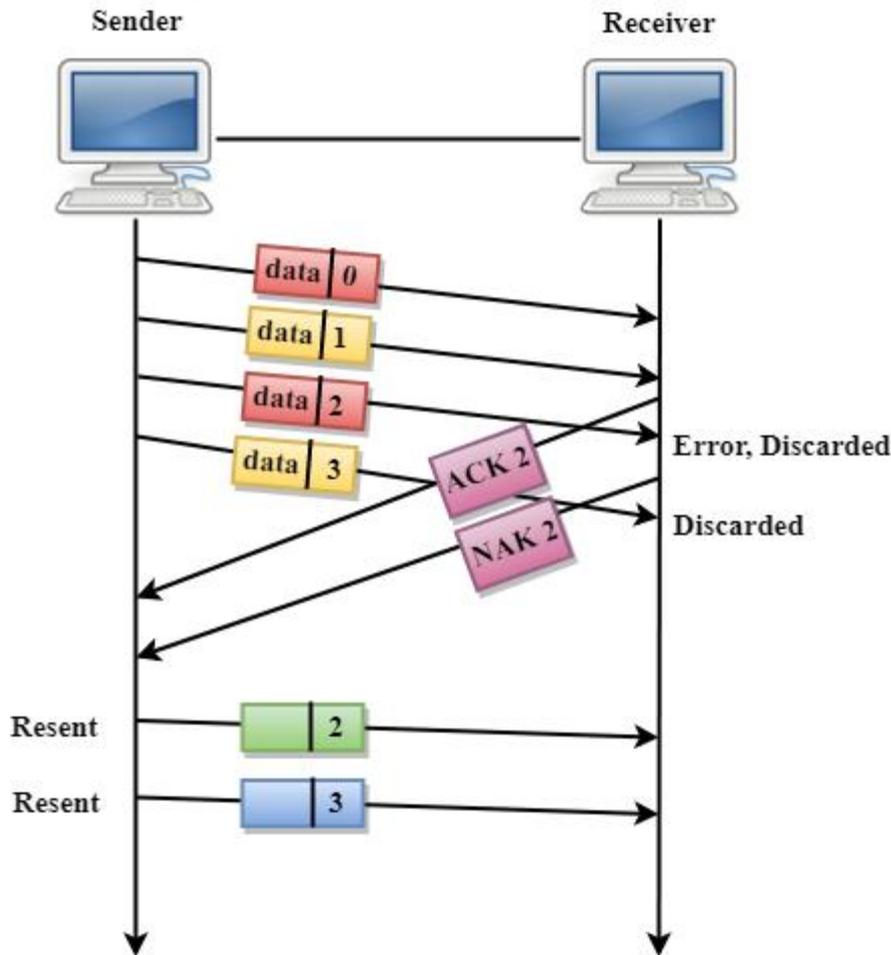

In the above figure, three frames have been transmitted before an error discovered in the third frame. In this case, ACK 2 has been returned telling that the frames 0,1 have been received successfully without any error. The receiver discovers the error in data 2 frame, so it returns the NAK 2 frame. The frame 3 is also discarded as it is transmitted after the damaged frame. Therefore, the sender retransmits the frames 2,3.

- **Lost Data Frame:** In Sliding window protocols, data frames are sent sequentially. If any of the frames is lost, then the next frame arrive at the receiver is out of sequence. The receiver checks the sequence number of each of the frame, discovers the frame that has been skipped, and returns the NAK for the missing frame. The sending device retransmits the frame indicated by NAK as well as the frames transmitted after the lost frame.

- **Lost Acknowledgement:** The sender can send as many frames as the windows allow before waiting for any acknowledgement. Once the limit of the window is reached, the sender has no more frames to send; it must wait for the acknowledgement. If the acknowledgement is lost, then the sender could wait forever. To avoid such situation, the sender is equipped with the timer that starts counting whenever the window capacity is reached. If the acknowledgement has not been received within the time limit, then the sender retransmits the frame since the last ACK.

Selective-Reject ARQ

- Selective-Reject ARQ technique is more efficient than Go-Back-n ARQ.
- In this technique, only those frames are retransmitted for which negative acknowledgement (NAK) has been received.
- The receiver storage buffer keeps all the damaged frames on hold until the frame in error is correctly received.
- The receiver must have an appropriate logic for reinserting the frames in a correct order.
- The sender must consist of a searching mechanism that selects only the requested frame for retransmission.

